



P/N	PERF.LVL	CONTACT ASSIGNMENT												POS										
		1				2				3														
8-1393755-3 1393756-5	1	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	64
	2	z	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
	b	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
	d	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
f	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		

+ CONTACT

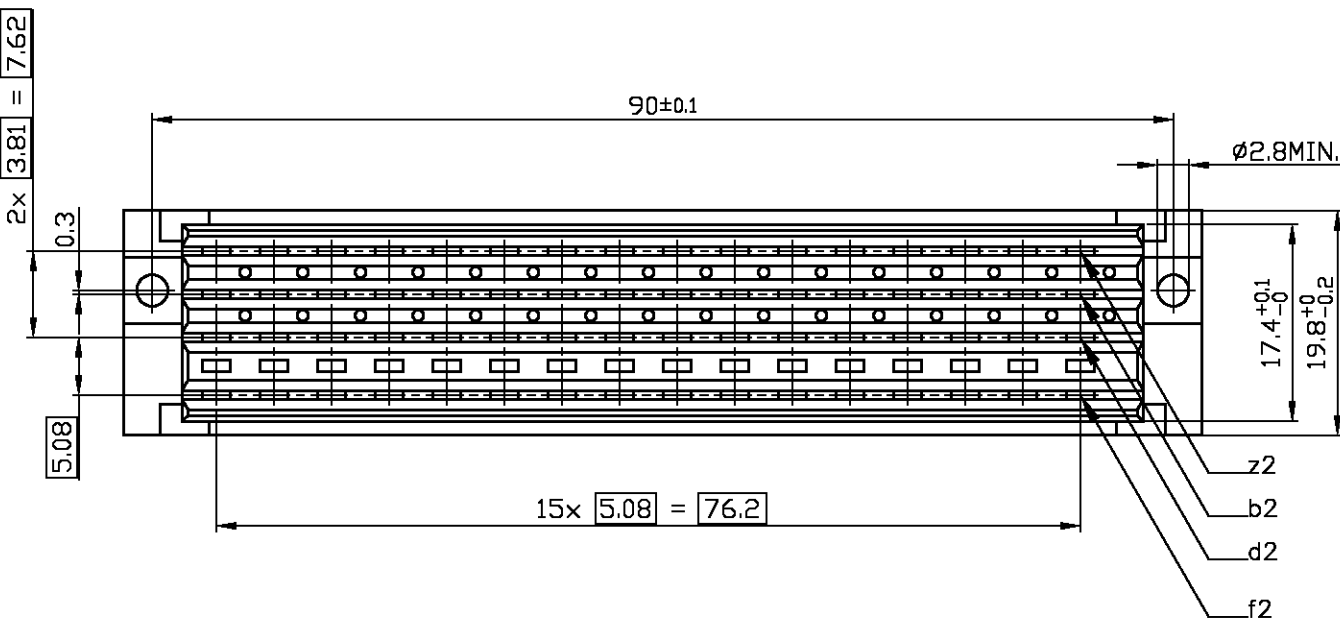

NOTES:

- HOUSING: GLASS FILLED THERMOPLASTIC UL 94 V-0 RATED; GREY
 - CONTACTS: COPPER ALLOY
 - PLATING:
CONTACT AREA: PERFORMANCE LEVEL 1 OR 2 (SEE TABLE)
ACCORDING TO DIN 41612 AND EN 60603-2, TYPE G
SOLDERING AREA: 3-7µm TIN OVER 0,8µm NICKEL
- ⚠ CONNECTOR IS PRINTED WITH PARTNUMBER AND DATECODE

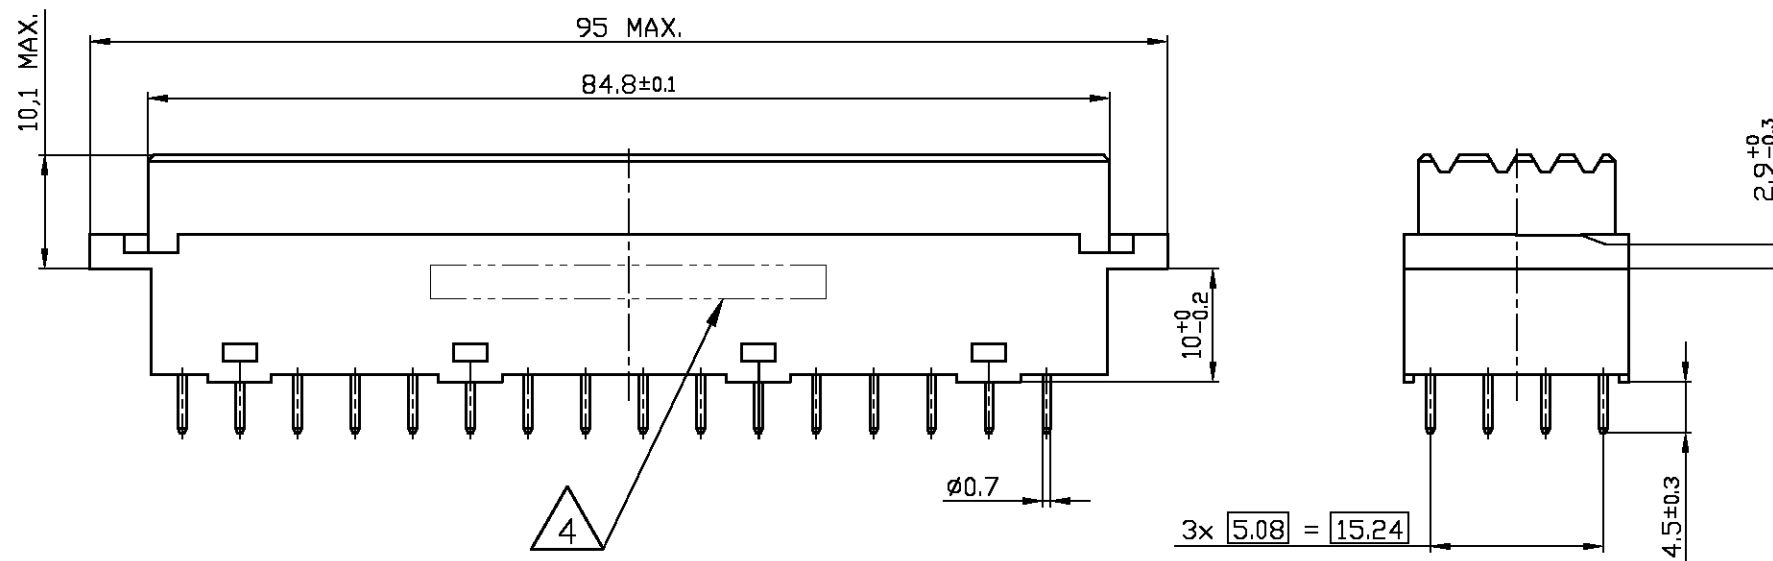

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19DEC2007 J.van Hoek		Tyco Electronics Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
DIMENSIONS: mm		CHK 19DEC2007 B.Mooij		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD 19DEC2007 J.Broeksteeg		EUROCARD FEMALE CONNECTOR TYPE G 64 POS. STRAIGHT	
MATERIAL		FINISH		PRODUCT SPEC	APPLICATION SPEC
-		-		WEIGHT	RESTRICTED TO
-		-		SIZE A3	CAGE CODE 00779
		DRAWING NO C-8-1393755-3			
CUSTOMER DRAWING		SCALE 1:1		SHEET 1 OF 1	
				REV A	