
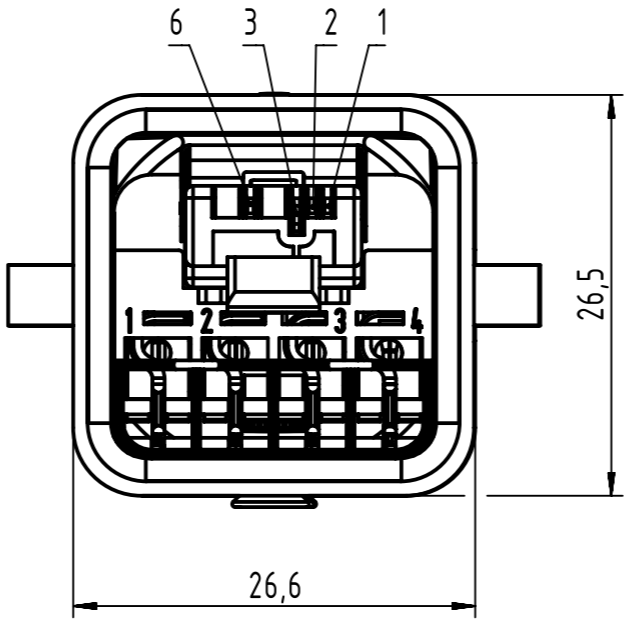
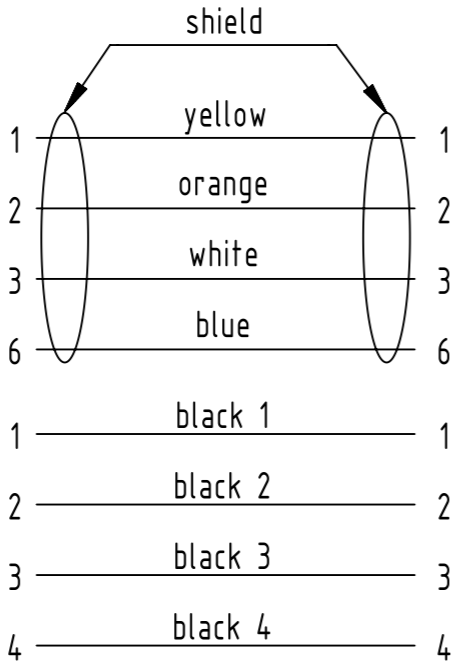


Han3A RJ45 Hybrid Cat5 plug 4+4p IDC (plastic version)

X (2:1)

Loading-Plan:


Y (2:1)

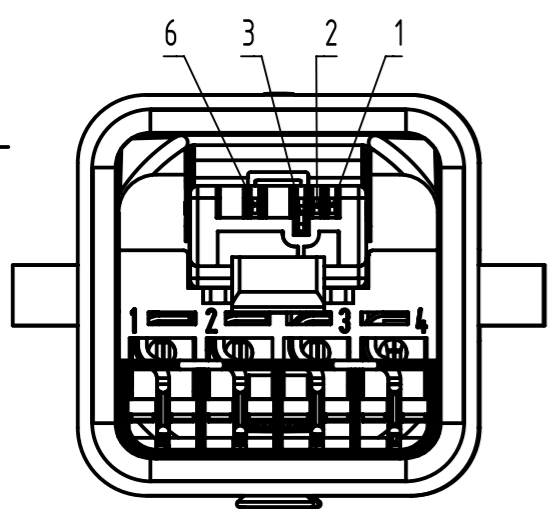

Protection level: IP67
Temperature range: -20°C ...+70°C

25	09457251361	100	
24	09457251360	90	
23	09457251359	80	
22	09457251358	70	
21	09457251357	60	
20	09457251356	50	
19	09457251355	40	
18	09457251354	30	
17	09457251332	25	
16	09457251353	20	
15	09457251352	15	
14	09457251333	12	
13	09457251351	10	
12	09457251331	9	
11	09457251330	8	
10	09457251329	7	
9	09457251328	6	
8	09457251327	5	
7	09457251326	4	
6	09457251325	3	
5	09457251324	2	
4	09457251323	1.5	
3	09457251322	1	
2	09457251362	0.8	
1	09457251321	0.5	
Cont. no	Part-no.	Type of cable	Dim. a [m]

RJ Ethernet Hybrid cable
4AWG 22/7 + 4x1.5mm² Cat. 5, FRNC

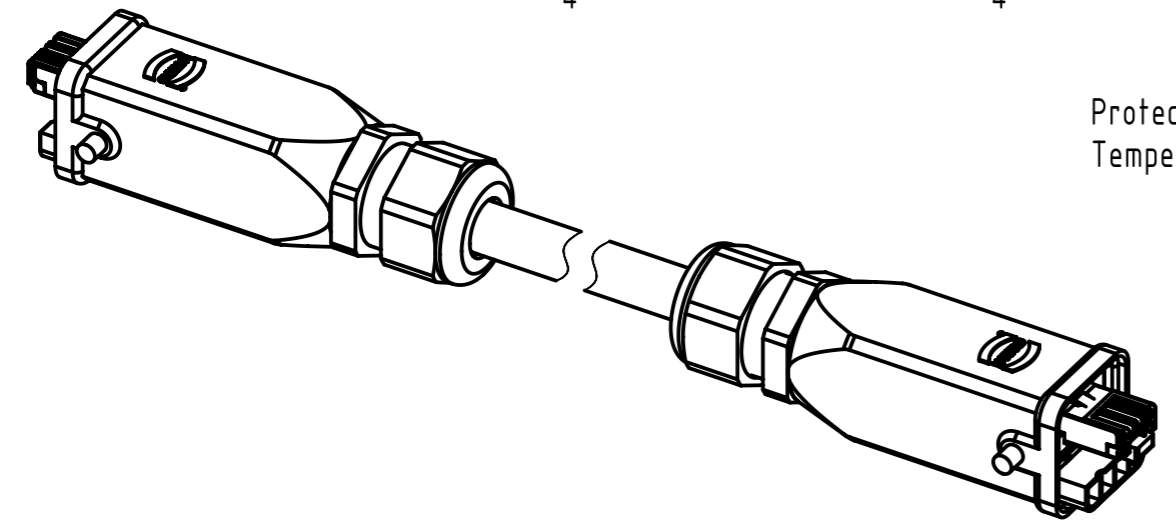

	All rights reserved	Created by TOMUTA	Inspected by AVRAM	Standardisation HOFFMANN	Date 2014-06-10	State Final Release
	Department EC PD - RO	Title Han 3A RJ45 Hybrid Cable Assembly				Doc-Key / ECM-Nr. 100155668/UGD/008/B 50000075843
HARTING Electronics GmbH D-32339 Espelkamp		Type TB	Number 094572513XX		Rev. B	Page 1/1